

Downlight



FZL-DL02-00 Series



5W

Specifications

- Luminous Flux (lm): 210 (±10%) with 3000K / 250 (±10%) with 4000K / 300 (±10%) with 6000K
- Power Consumption (W): 4.5
- **LED: Liteon**
- CCT (K): 3000K (WW) / 4000K (NW) / 6000K (CW)
- Lifetime (hrs): >35000
- Beam Angle: 120°
- Net Weight (kgs): 0.17 (±10%) with driver

Model	FZL-DL02-00-WW-05 FZL-DL02-00-NW-05 FZL-DL02-00-CW-05	FZL-DL02-00-WW-05TDH FZL-DL02-00-NW-05TDH FZL-DL02-00-CW-05TDH	FZL-DL02-00-WW-05TDL FZL-DL02-00-NW-05TDL FZL-DL02-00-CW-05TDL
Input Voltage (V)	AC 100 – 240V (Non-dimmable)	AC 220 – 240V (TriAC dimmable)	AC 100 – 120V (TriAC dimmable)

FZL-DL03-00 Series

8W

Specifications


- Luminous Flux (lm): 330 (±10%) with 3000K / 400 (±10%) with 4000K / 480 (±10%) with 6000K
- Power Consumption (W): 8
- **LED: Liteon**
- CCT (K): 3000K (WW) / 4000K (NW) / 6000K (CW)
- Lifetime (hrs): >35000
- Beam Angle: 120°
- Net Weight (kgs): 0.38 (±10%) with driver

Model	FZL-DL03-00-WW-08 FZL-DL03-00-NW-08 FZL-DL03-00-CW-08	FZL-DL03-00-WW-08TDH FZL-DL03-00-NW-08TDH FZL-DL03-00-CW-08TDH	FZL-DL03-00-WW-08TDL FZL-DL03-00-NW-08TDL FZL-DL03-00-CW-08TDL
Input Voltage (V)	AC 100 – 240V (Non-dimmable)	AC 220 – 240V (TriAC dimmable)	AC 100 – 120V (TriAC dimmable)

Dimension

FZL-DL-02-00 Series

- Ceiling drill hole:  68 ~ 75mm

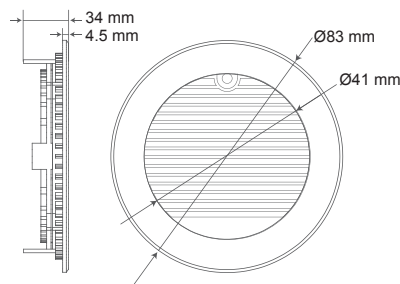

FZL-DL-03-00 Series

- Ceiling drill hole:  90 ~ 95mm

