


# T8

# Tube Light

## FZL-T8-06 Series

### Dimension

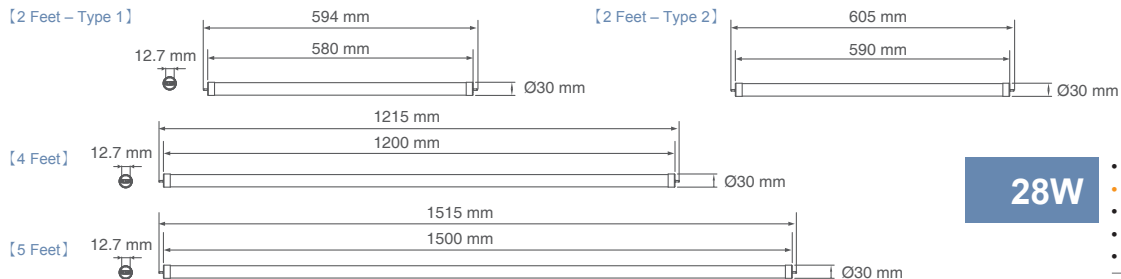

### Specifications

12W

- Power Consumption (W): 12
- LED: **Liteon**
- Lifetime (hrs): >35000
- Socket: G13
- Dimmable: Non-dimmable

- **Housing: Plastic + Aluminum**
- Input Voltage (V): AC 100 – 240V
- Beam Angle: 120°
- Net Weight (kgs): 0.210 (±10%)

Model	FZL-T8-06-WW-12	FZL-T8-06-NW-12	FZL-T8-06-CW-12
CCT (K)	3000	4000	6000
Luminous Flux (lm)	710 (±10%)	850 (±10%)	1000 (±10%)
Dimension (mm)	2 Feet – Type 1: Ø30 X 580 / 2 Feet – Type 2: Ø30 X 600		

18W

- Power Consumption (W): 18
- LED: **Liteon**
- Lifetime (hrs): >35000
- Socket: G13
- Dimmable: Non-dimmable

- **Housing: Plastic + Aluminum**
- Input Voltage (V): AC 100 – 240V
- Beam Angle: 120°
- Net Weight (kgs): 0.432 (±10%)

Model	FZL-T8-06-WW-18	FZL-T8-06-NW-18	FZL-T8-06-CW-18
CCT (K)	3000	4000	6000
Luminous Flux (lm)	1200 (±10%)	1300 (±10%)	1600 (±10%)
Dimension (mm)	4 Feet: Ø30 X 1198		

22W

- Power Consumption (W): 22
- LED: **Liteon**
- Lifetime (hrs): >35000
- Socket: G13
- Dimmable: Non-dimmable

- **Housing: Plastic + Aluminum**
- Input Voltage (V): AC 100 – 240V
- Beam Angle: 120°
- Net Weight (kgs): 0.432 (±10%)

Model	FZL-T8-06-WW-22	FZL-T8-06-NW-22	FZL-T8-06-CW-22
CCT (K)	3000	4000	6000
Luminous Flux (lm)	1600 (±10%)	1800 (±10%)	2200 (±10%)
Dimension (mm)	4 Feet: Ø30 X 1198		



28W

- Power Consumption (W): 28
- LED: **Liteon**
- Lifetime (hrs): >35000
- Socket: G13
- Dimmable: Non-dimmable

- **Housing: Plastic + Aluminum**
- Input Voltage (V): AC 100 – 240V
- Beam Angle: 120°
- Net Weight (kgs): 0.530 (±10%)

Model	FZL-T8-06-WW-28	FZL-T8-06-NW-28	FZL-T8-06-CW-28
CCT (K)	3000	4000	6000
Luminous Flux (lm)	2020 (±10%)	2300 (±10%)	2800 (±10%)
Dimension (mm)	5 Feet – Type 1: Ø30 X 1500		

44W

- Power Consumption (W): 44
- LED: **Liteon**
- Lifetime (hrs): >35000
- Socket: G13 / R17D / FA8
- Dimmable: Non-dimmable

- **Housing: Plastic + Aluminum**
- Input Voltage (V): AC 90 – 277V
- Beam Angle: 120°
- Net Weight (kgs): 0.90 (±10%)

Model	FZL-T8-06-WW-45	FZL-T8-06-NW-45	FZL-T8-06-CW-45
CCT (K)	3000	4000	6000
Luminous Flux (lm)	3200 (±10%)	3600 (±10%)	4400 (±10%)

### Dimension

