


PAR30 Spotlight



► Dimension

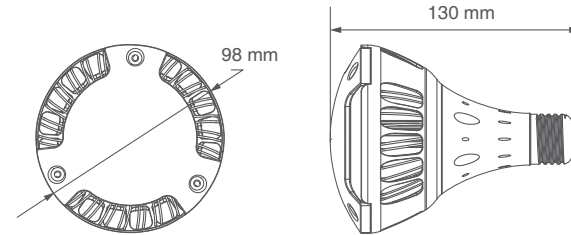

FZL-PAR30-02 Series

12W

► Specifications

- Luminous Flux (lm): 550 (±10%) with 3000K / 700 (±10%) with 6000K
- Power Consumption (W): 12
- LED: Samsung
- CCT (K): 3000 (WW) / 6000 (CW)
- Lifetime (hrs): >35000
- Beam Angle: Clear Cover – 25° / 40° / 60°
Frosted cover – 120°
- Socket: E26 / E27
- Net Weight (kgs): 0.250 (±10%)
- Switching Dimmable 4 steps, 100%, 50%, 25%, 12%

Model

FZL-PAR30-02-WW-12 / FZL-PAR30-02-CW-12

FZL-PAR30-02-WW-12SD / FZL-PAR30-02-CW-12SD

Input Voltage (V)

AC 90 – 264V (Non-dimmable)

AC 90 – 264V (Switching Dimmable)

Model

FZL-PAR30-02-WW-12TDH / FZL-PAR30-02-CW-12TDH

FZL-PAR30-02-WW-12TDL / FZL-PAR30-02-CW-12TDL

Input Voltage (V)

AC 220 – 240V (TriAC dimmable)

AC 100 – 120V (TriAC dimmable)

FZL-PAR30-03 Series

12W

► Specifications

- Luminous Flux (lm): 750 (±10%) with 3000K / 850 (±10%) with 6000K
- Power Consumption (W): 12
- LED: Cree
- CCT (K): 3000 (WW) / 6000 (CW)
- Lifetime (hrs): >35000
- Beam Angle: Clear Cover – 25° / 40° / 60°
Frosted cover – 120°
- Socket: E26 / E27
- Net Weight (kgs): 0.250 (±10%)
- Switching Dimmable 4 steps, 100%, 50%, 25%, 12%

Model

FZL-PAR30-03-WW-12 / FZL-PAR30-03-CW-12

FZL-PAR30-03-WW-12SD / FZL-PAR30-03-CW-12SD

Input Voltage (V)

AC 90 – 264V (Non-dimmable)

AC 90 – 264V (Switching Dimmable)

Model

FZL-PAR30-03-WW-12TDH / FZL-PAR30-03-CW-12TDH

FZL-PAR30-03-WW-12TDL / FZL-PAR30-03-CW-12TDL

Input Voltage (V)

AC 220 – 240V (TriAC dimmable)

AC 100 – 120V (TriAC dimmable)