

# Downlight



**FZL-DL08-00 Series**



22W

## Specifications

- Luminous Flux (lm): 1150 (±10%) with 3000K / 1200 (±10%) with 4000K / 1400 (±10%) with 6000K
- Power Consumption (W): 22
- LED: **Liteon**
- CCT (K): 3000K (WW) / 4000K (NW) / 6000K (CW)
- Lifetime (hrs): >35000
- Beam Angle: 120°
- Net Weight (kgs): 0.66 (±10%) with driver

| Model             | FZL-DL08-00-WW-22<br>FZL-DL08-00-NW-22<br>FZL-DL08-00-CW-22 | FZL-DL08-00-WW-22TDH<br>FZL-DL08-00-NW-22TDH<br>FZL-DL08-00-CW-22TDH | FZL-DL08-00-WW-22TDL<br>FZL-DL08-00-NW-22TDL<br>FZL-DL08-00-CW-22TDL |
|-------------------|---|--|--|
| Input Voltage (V) | AC 100 – 240V (Non-dimmable)                                | AC 220 – 240V (TriAC dimmable)                                       | AC 100 – 120V (TriAC dimmable)                                       |

**FZL-DL10-00 Series**

28W

## Specifications


- Luminous Flux (lm): 1500 (±10%) with 3000K / 1600 (±10%) with 4000K / 1800 (±10%) with 6000K
- Power Consumption (W): 28
- LED: **Liteon**
- CCT (K): 3000K (WW) / 4000K (NW) / 6000K (CW)
- Lifetime (hrs): >35000
- Beam Angle: 120°
- Net Weight (kgs): 1.2 (±10%) with driver

| Model             | FZL-DL10-00-WW-28<br>FZL-DL10-00-NW-28<br>FZL-DL10-00-CW-28 | FZL-DL10-00-WW-28TDH<br>FZL-DL10-00-NW-28TDH<br>FZL-DL10-00-CW-28TDH | FZL-DL10-00-WW-28TDL<br>FZL-DL10-00-NW-28TDL<br>FZL-DL10-00-CW-28TDL |
|-------------------|---|--|--|
| Input Voltage (V) | AC 100 – 240V (Non-dimmable)                                | AC 220 – 240V (TriAC dimmable)                                       | AC 100 – 120V (TriAC dimmable)                                       |

## Dimension

### FZL-DL08-00 Series

- Ceiling drill hole: 220 ~ 230mm

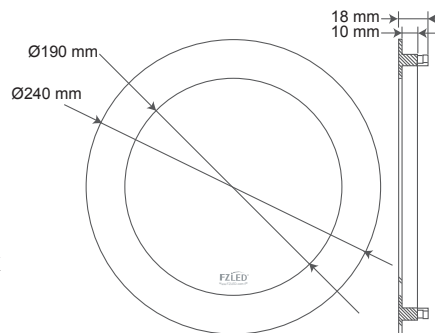

### FZL-DL10-00 Series

- Ceiling drill hole: 280 ~ 290mm

