


# Panel Light



**FZL-PL120-01-42 Series** (1200 x 300 mm)

## Dimension

FZL-PL120-01-42 Series / FZL-PL120-01-52 Series

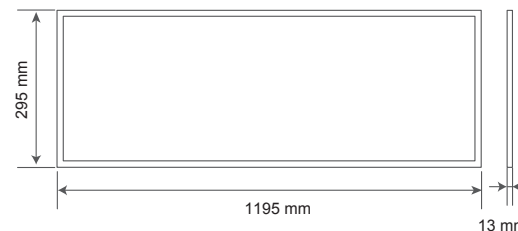

42W

### Specifications

- Luminous Flux (lm): 2400 (±10%) with 3000K / 2500 (±10%) with 4000K / 3400 (±10%) with 6000K
- Power Consumption (W): 42
- LED: **Liteon**
- CCT (K): 3000K (WW) / 4000K (NW) / 6000K (CW)
- Lifetime (hrs): >35000
- Beam Angle: 120°
- Net Weight (kgs): 4.7 (±10%) with driver

Model	FZL-PL120-00-WW-42 FZL-PL120-00-NW-42 FZL-PL120-00-CW-42	FZL-PL120-00-WW-42TDH FZL-PL120-00-NW-42TDH FZL-PL120-00-CW-42TDH	FZL-PL120-00-WW-42TDL FZL-PL120-00-NW-42TDL FZL-PL120-00-CW-42TDL
Input Voltage (V)	AC 100 – 240V (Non-dimmable)	AC 220 – 240V (TriAC dimmable)	AC 100 – 120V (TriAC dimmable)

**FZL-PL120-01-52 Series** (1200 x 300 mm)

52W

### Specifications

- Luminous Flux (lm): 2900 (±10%) with 3000K / 3050 (±10%) with 4000K / 4200 (±10%) with 6000K
- Power Consumption (W): 52
- LED: **Liteon**
- CCT (K): 3000K (WW) / 4000K (NW) / 6000K (CW)
- Lifetime (hrs): >35000
- Beam Angle: 120°
- Net Weight (kgs): 4.7 (±10%) with driver

Model	FZL-PL120-00-WW-52 FZL-PL120-00-NW-52 FZL-PL120-00-CW-52	FZL-PL120-00-WW-52TDH FZL-PL120-00-NW-52TDH FZL-PL120-00-CW-52TDH	FZL-PL120-00-WW-52TDL FZL-PL120-00-NW-52TDL FZL-PL120-00-CW-52TDL
Input Voltage (V)	AC 100 – 240V (Non-dimmable)	AC 220 – 240V (TriAC dimmable)	AC 100 – 120V (TriAC dimmable)