

T8


Tube Light

FZL-T8-07 Series




CE FC

Dimension

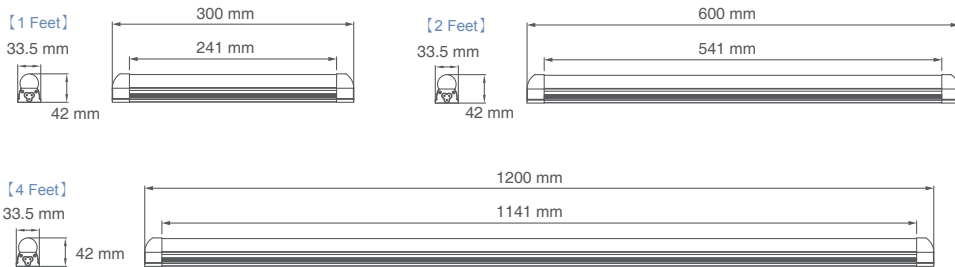

Accessories

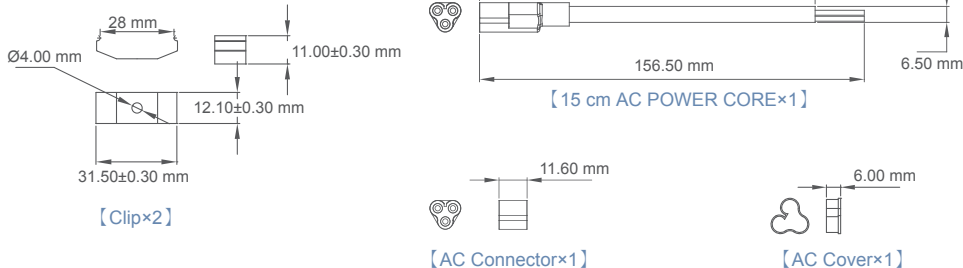

Specifications

6W

- Power Consumption (W): 6 (±10%)
- **LED: Liteon**
- Input Voltage (V): AC 100 - 240V
- Lifetime (hrs): >35000
- Beam Angle: 120°
- Socket: 3 Pin
- Net Weight (kgs): 0.150 (±10%)
- Dimmable: Non-dimmable

Model	FZL-T8-07-WW-06	FZL-T8-07-NW-06	FZL-T8-07-CW-06
CCT (K)	3000	4000	6000
Luminous Flux (lm)	355 (±10%)	425 (±10%)	500 (±10%)
Dimension (mm)	1 feet – Ø33.5×42×300		

12W

- Power Consumption (W): 12 (±10%)
- **LED: Liteon**
- Input Voltage (V): AC 100 - 240V
- Lifetime (hrs): >35000
- Beam Angle: 120°
- Socket: 3 Pin
- Net Weight (kgs): 0.250 (±10%)
- Dimmable: Non-dimmable

Model	FZL-T8-07-WW-12	FZL-T8-07-NW-12	FZL-T8-07-CW-12
CCT (K)	3000	4000	6000
Luminous Flux (lm)	710 (±10%)	850 (±10%)	1000 (±10%)
Dimension (mm)	2 feet – Ø33.5×42×600		

22W

- Power Consumption (W): 22 (±10%)
- **LED: Liteon**
- Input Voltage (V): AC 100 - 240V
- Lifetime (hrs): >35000
- Beam Angle: 120°
- Socket: 3 Pin
- Net Weight (kgs): 0.480 (±10%)
- Dimmable: Non-dimmable

Model	FZL-T8-07-WW-22	FZL-T8-07-NW-22	FZL-T8-07-CW-22
CCT (K)	3000	4000	6000
Luminous Flux (lm)	1600 (±10%)	1800 (±10%)	2200 (±10%)
Dimension (mm)	4 feet – Ø33.5×42×1200		